



- 2055 Quick Start 2
- 1055 Quick Start 4
- Operation 6
- Robot Positions 18
- Misc. Adjustments..... 19
- Drill Diagrams21
- Speed Calib. Target ..27
- RP.2.PC 28
- Important Notices.... 34
- Take-Down, 205535
- Maintenance37
- Chip Replacement ... 38
- Exploded Views 39
- Parts List..... 44
- Warranty & Repair ... 46




Robo-Pong 2055 and Robo-Pong 1055
OWNER'S MANUAL

2055 QUICK START

1 Verify All Parts

Unpack all the parts and check that all are present. If unable to identify a part, look for a small silver label with the part name. If a part is missing, please contact Newgy. You may want to keep your box and styrofoam pieces in case you need to ship your robot.

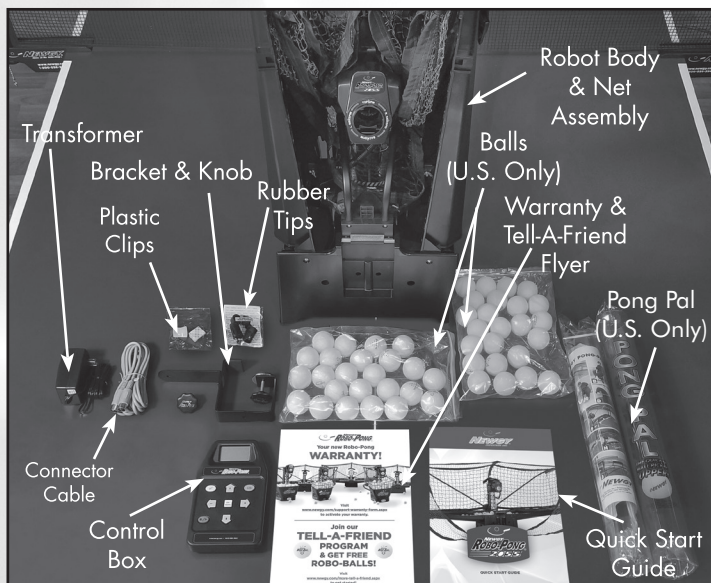


2 Pull down support legs

Place the robot on the table with the open front side facing you. Pull the curved black metal support legs toward you.



3 Spread Support Legs Apart

Spread out the support legs to their fully open position.

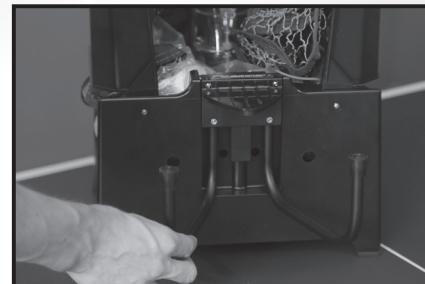

4 Join Net Support Tubes

Turn the robot around 180° so the Net Support Tubes are now facing you. Grasp the second tube from your right and pull up, removing it from its storage hole. Place the bottom of this tube into the top of the first tube on your right as shown. Repeat on the left side.



5 Gently Lower Ball Trays

Grasp one of the Ball Return Trays, lift straight up to unlock it, grasp the adjacent Net Support Tube, and slowly lower them into position. Be careful not to let the tray or support tube slam down. Repeat on the other side.



6

Attach the Robot to the Table

Pick up the robot by the center base and secure it to the table by angling it downward and against the table. The support legs should be as wide as possible before they go underneath the table and the front support triangle sits on top of the table.



7

Place Balls* in Bucket

Open the bag(s) of balls. Wash and dry them, and then place in the Ball Tray. Add any additional new table tennis balls that have been washed and dried, or any used balls with a worn surface. All balls must be 40mm or 40+mm in diameter. (*Included with U.S. robots only.) Do not mix 40mm and 40+mm balls.

8

Adjust Head Angle

Tilt the head downward as far as possible by loosening the Brass Knob and then re-tighten after moving head. Verify that the word "topspin" is at the top of the ball discharge hole.



9

Attach the Side Nets


Attach the side nets to your table tennis table net by slipping the red flexible band over your table net's support base and looping it over the table net's clamp screw.



10

Connect Cable to Robot

Plug one end of the Connector Cable into the 5-Pin Connector on the back of the robot as shown. Take the other end of the cable to the player's end of the table.



11

Attach Bracket to Control Box


Turn Control Box upside down on the table. Take the Mounting Bracket and align the hole in the mounting arm with the threaded insert of the Control Box. Secure bracket with Mounting Screw. Leave Control Box laying face down.



12

Connect Cables to Control Box

Bring the free end of the Connector Cable to the player's end of the table. Plug the Connector Cable into the 5-pin socket on the bottom of the Control Box. Then insert the Transformer's pin into the power jack of the Control Box.



13

Adjust Bracket to Top Thickness

Pick up the Control Box and looking across the round rubber pad of the Adjustment Screw, raise or lower the height of the rubber pad so it aligns with the nearest mark on the bracket's label that corresponds with the thickness of your table's top.



14

Attach Control Box To Table

Angle the opening between the two rubber pads of the Mounting Bracket towards the bottom of your table's apron. Slip the bracket onto the table. The rectangular rubber pad of the bracket should sit flat on the table's top surface. If it is not flat, loosen or tighten the Adjustment Screw until the pad lays flat. This is not a clamping mechanism—do not overtighten!



Obsah je uzamčen

Dokončete, prosím, proces objednávky.

Následně budete mít přístup k celému dokumentu.



Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

**) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!