


# EM-101WIFI (H2014)


GB	Colour Video Doorphone Set
CZ	Sada barevného videotelefonu
SK	Sada farebného videotelefónu
PL	Zestaw wideodomofonowy
HU	Színes képernyős videotelefon-készlet
SI	Set barvnega videotelefona
RS HR BA ME	Komplet videotelefona u boji
DE	Farbvideotelefon-Set
UA	Комплект кольорового відеодомофону
RO MD	Set videotelefon color
LT	Spalvinio vaizdo telefono komplektas
LV	Krāsu videotālruna komplekts
EE	Värvivideofoni komplekt
BG	Комплект цветен видеодомофон




**Video-doorkeeper Wiring Diagram | Schéma zapojení videovrátného | Schéma zapojenia videovrátnika | Schemat podłączenia videodomofonu | Videoportás bekötési ábra | Shema priključitve video domofon | Električka shema videoportafona | Schaltschema der Türvideoanlage | Схе́ма підключення відеосторожа | Schema de conectare a videointerfonului | Vaizdo telefono elektrinės dalies sujungimo schema | Video durvju sarga elektroinstalācijas shēma**

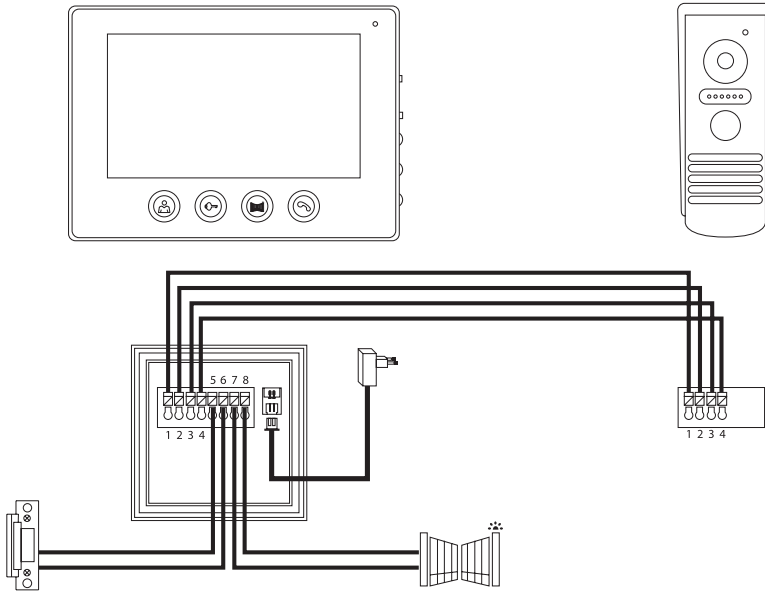

1

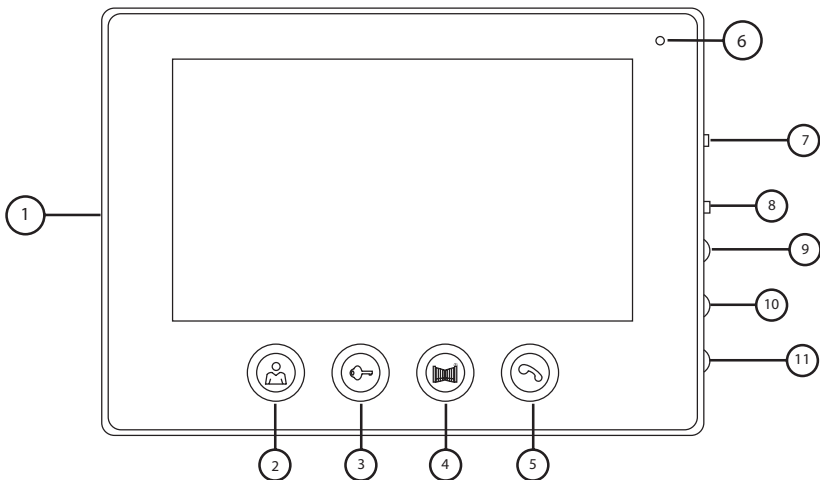

2

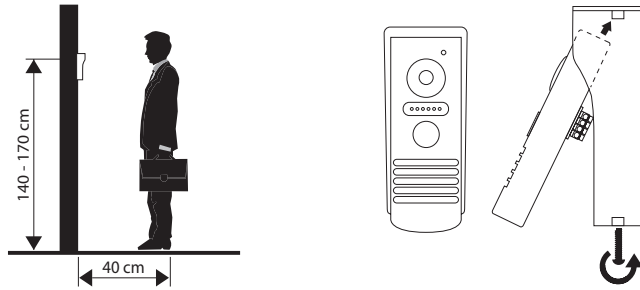

## GB | Colour Video Doorphone Set

### Contents of Delivery

- 1 monitor
- 1 mounting frame for the videophone
- 1 door camera unit
- mounting screws

### Technical Description of the Monitor

see Fig. 2

#### Description:

- |                       |                        |
|-----------------------|------------------------|
| 1 – speaker           | 7 – ringtone volume    |
| 2 – preview           | 8 – ringtone selection |
| 3 – door lock control | 9 – image brightness   |
| 4 – gate control      | 10 – image colour      |
| 5 – accept/end call   | 11 – speech volume     |
| 6 – microphone        |                        |

### Installation

#### Choosing a Place for Installing the Monitor

Take into account the need for cables when choosing a place to install the device. It is recommended that the device be placed at eye level of the user.

#### Installation of Mounting Frame

Place the mount on the mounting spot, mark out the locations for mounting holes and drill them into the wall. Sufficient space must remain in the centre of the mount for cables to the monitor (cable from the camera, power supply cable, etc.). Attach the mount using screws; you can also add wall plugs.

#### Attaching Cables

Connect the door camera unit to the monitor by plugging the cable into the prescribed terminals on both devices.

#### Suspending the Monitor

Gently press the monitor to the holder so that the protrusions lock into the openings at the rear of the monitor. Pushing the monitor slightly downwards will fix it in place.

#### Connecting the Device to Power

Connect the power cable to a network which meets the 230 V/50 Hz parameters of the device.

### Installation of the Door Camera Unit

see Fig. 3

1. Unscrew the screw on the bottom side and slide the door camera unit out from the aluminium hood.
2. Choose a suitable place for mounting and attach the hood.
3. Attach the connected door camera unit to the covering hood using the enclosed screws.

### Mounting the Door Camera Unit onto Plaster

Apply a layer of silicone between the wall and the door camera unit to prevent ingress of humidity. The silicone should be applied on the top and the sides. The bottom side must remain free to allow humid air to flow away.

### Parameters of Connection Cables

For distances under 50 m, we recommend a quality FTP CAT.5 cable (optimally CAT.6). At over 50 m, we recommend consulting technical support.

Connect individual conductors in pairs, onto identically numbered terminals on the videophone and the camera unit. The cable shielding must be connected on both sides onto terminal no. 2 (GND).

The connecting cable must not be led along the route of 230/380 V AC cabling.

# Obsah je uzamčen

**Dokončete, prosím, proces objednávky.**

**Následně budete mít přístup k celému dokumentu.**



**Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:**

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne\*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

*\*) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!