




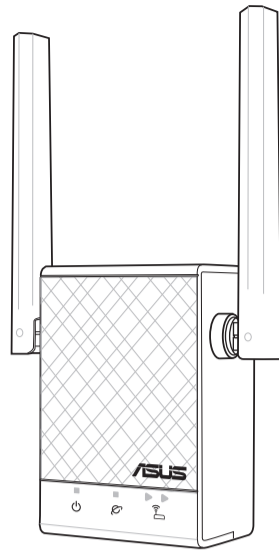

Quick Start Guide


RP-AC51
Wi-Fi AC Repeater

E12398 / First Edition / March 2017







LED explanations

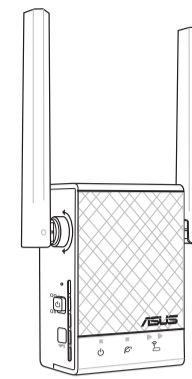-  **POWER**
On: RP-AC51 is power on.
Off: RP-AC51 is power off.
-  **EXISTING NETWORK**
On: Connected to the router/AP.
Off: Not connected to the router/AP.
-  **MOVE CLOSER**
Need to move RP-AC51 closer to the router/AP.
-  **MOVE AWAY SLIGHTLY**
Need to move RP-AC51 slightly away from the router/AP.



Button explanations


-  **POWER SWITCH**
Switch this button on/off to turn RP-AC51 on/off.
-  **WPS BUTTON**
Press this button to quickly connect to the router/AP via the WPS method.
-  **RESET BUTTON**
Use a pin to push this button to reset RP-AC51 to its factory default settings.



BEFORE SETUP WE SUGGEST...



01 Placing your RP-AC51

- 1 Place your RP-AC51 near your router/AP.
- 2 Check the LEDs and see the LED explanations.

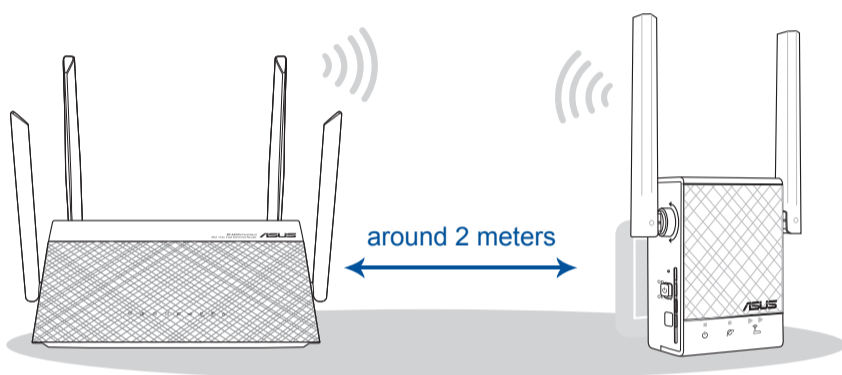

02 Power On

- 1 Plug your RP-AC51 to a power outlet.
- 2 Turn on the power switch.

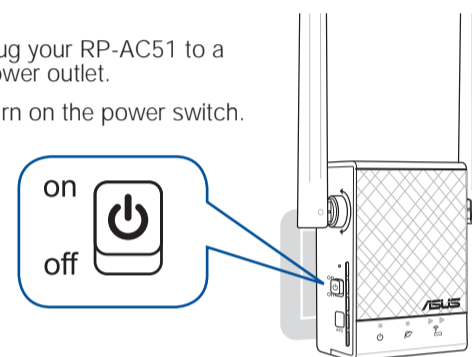

Wait until the power LED turns blue, indicating that your RP-AC51 is ready to connect to your existing router/AP.


SETUP METHODS

METHOD 1 APP SUPPORT

01 Download the app



02 Use the app

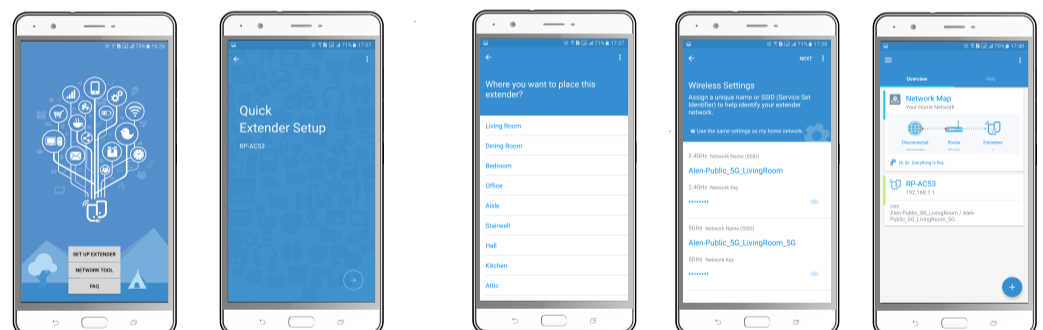


- 1 Tap **SET UP EXTENDER**.
- 2 Open your phone Wi-Fi, and connect to your RP-AC51's SSID.
- 3 Follow the Quick Extender Setup instructions.
- 4 Assign a unique network name (SSID) for your extended network.
- 5 Wait until the setup is completed.


METHOD 2 WPS SUPPORT

01 Connect via WPS

- 1 Press the WPS button on your router/AP.

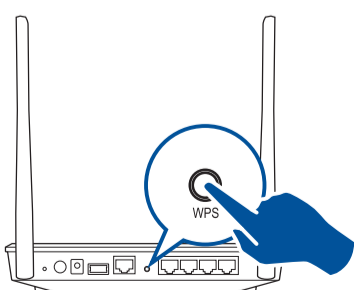


- 2 Press the WPS button on your RP-AC51 for more than two (2) seconds until the power LED starts to blink.



NOTE: Wait until the existing network LED blinks for about two (2) minutes, then turns solid blue, indicating the WPS process is completed.

02 Enjoy Wi-Fi

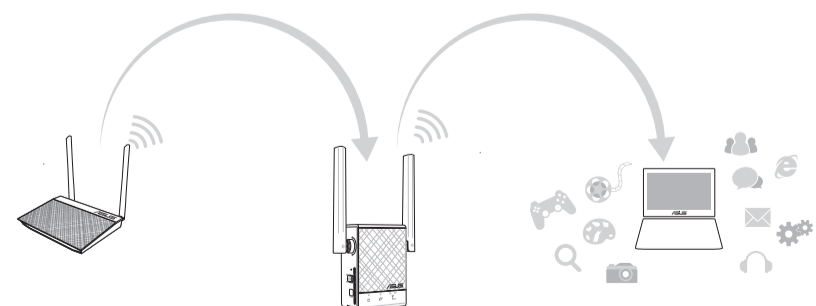

Your RP-AC51's wireless network name (SSID) changes to your existing Wi-Fi network name, ending with **_RPT** or **_RPT5G** and shares your router/AP's Wireless Password.

Obsah je uzamčen

Dokončete, prosím, proces objednávky.

Následně budete mít přístup k celému dokumentu.



Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

**) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!