

MG10  
GOLD

MG15FX  
GOLD

MG30FX  
GOLD

MG50FX  
GOLD



**OWNER'S MANUAL**

*Marshall*

## INTRODUCTION

---

Congratulations on your purchase of this MG Gold amplifier from Marshall Amplification.

The MG provides modern Marshall tones for the player who is on the go.

With your MG you can easily dial in storable sounds and effects including sparkling clean, rich driven blues, rock tone and heavy distorted metal settings. Every element from voicing through to the speaker has been carefully designed to give you flexibility at your fingertips.

From the punchy MG 10 to the powerful MG 50, each MG Gold amplifier is quick to set-up and delivers time and time again. Whether you are practicing at home or gigging on the road, the MG Gold not only looks good, it won't let you down.

We hope you enjoy your MG Gold amplifier.

*- The Marshall Team*

## WARNING! IMPORTANT SAFETY INSTRUCTIONS

---

### **WARNING:**

Before going any further, make sure that your amplifier is compatible with your mains electricity supply. If you have any doubt, please seek help from a qualified technician – your Marshall dealer can help you in this respect.

### **MAINS INPUT & FUSE:**

The specific mains input voltage rating for is indicated on the rear panel of the amplifier. MG50FX: Your amplifier is provided with a detachable mains (power) lead, which should be connected to the MAINS INPUT socket on the rear panel of the amplifier. The correct value and type of mains fuse is specified on the rear panel of each amplifier.

**NEVER** attempt to bypass the fuse or fit one of the incorrect value or type.

### **TRANSPORTING YOUR EQUIPMENT:**

Please ensure that your amplifier is switched off, unplugged from the mains electricity supply and that all removable cables have been disconnected from your equipment before attempting to move it.

### **IMPORTANT SET UP INFORMATION:**

#### **WARNING:**

Failure to select the correct impedance may damage your amplifier.

If connecting a speaker cabinet make sure that you use a proper speaker cable. Never use a screened (shielded) guitar cable for this purpose.

1. Ensure that the MAINS (power) switch is set to the OFF position.
2. Connect the supplied mains (power) lead into the MAINS INPUT first and then into the mains electricity supply.
3. Ensure that the VOLUME controls on the front panel are set to zero.
4. Plug your guitar into an INPUT jack socket.
5. Turn the front panel MAINS switch to the ON position.
6. Turn the VOLUME up to your preferred level and your amplifier is ready to play.

## COMPLIANCE STATEMENT (MG15FX, MG30FX & MG50FX)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Any changes or modifications not expressly approved by the party responsible for compliance could void the users authority to operate the equipment.

This device complies with CAN ICES-3(B)/NMB-3(B)


**PLEASE READ THIS MANUAL CAREFULLY  
BEFORE PLUGGING IN.**

**FOLLOW ALL INSTRUCTIONS AND HEED ALL WARNINGS.**

**KEEP THESE INSTRUCTIONS.**

ENGLISH

## MG10 FRONT PANEL FUNCTIONS

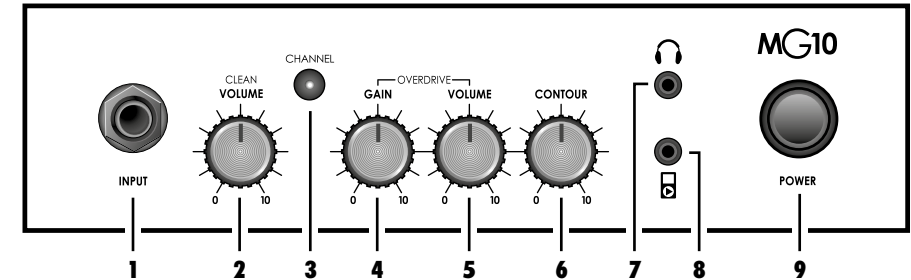

### 1. INPUT

Input for your guitar. Use a good quality guitar cable (i.e. one that's screened/shielded) to help prevent noise, interference and unwanted feedback.

### 2. VOLUME - CLEAN CHANNEL

This control adjusts the volume of the Clean Channel.

### 3. CHANNEL SWITCH

This switch allows you to change between the amp's two channels, Clean and Overdrive, via the front panel. When the LED is green, the Clean channel is engaged. When the LED is red, the Overdrive channel is engaged.

### 4. GAIN

This control sets the operating level of the pre-amp. Simply turn up the Gain control until the required amount of distortion is achieved.

### 5. VOLUME - OVERDRIVE CHANNEL

This control adjusts the volume of the Overdrive channel. The louder this channel is set, the 'looser' the amplifier will sound and feel.

### 6. CONTOUR

This highly effective tone control works by modifying the mid-range (body).

### 7. HEADPHONE OUT

For use when silent practice is the order of the day. Connection of headphones will automatically mute the internal speaker.

### 8. MP3 IN

If you want to jam to your favourite track, connect the line out or headphone output of your player here, adjust the volume of your player to match that of your guitar and you've got the perfect 'play-along' practice system.

### 9. MAINS

The power switch turns your amplifier on and off. The Channel switch will light up when your amplifier is turned on and will not be lit when the amplifier is switched off.

***Note:** The specific mains input voltage rating that your amplifier has been built for is shown on the back panel. Before connecting to the mains electricity supply, always ensure that your amplifier is compatible with your electricity supply. If you have any doubt, please get advice from a qualified technician. Your Marshall dealer will help you in this respect.*

***Warning:** Please ensure the amplifier is switched off and unplugged from the mains electricity supply before being moved.*

# Obsah je uzamčen

**Dokončete, prosím, proces objednávky.**

**Následně budete mít přístup k celému dokumentu.**



**Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:**

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne\*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

*\*) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!