


E8860

GB	Thermometer
CZ	Teploměr
SK	Teplomer
PL	Termometr
HU	Hőmérő
SI	Termometer
RS HR BA	Termometar
DE	Thermometer
UA	Термометр
RO	Termometru
LT	Termometras
LV	Termometrs



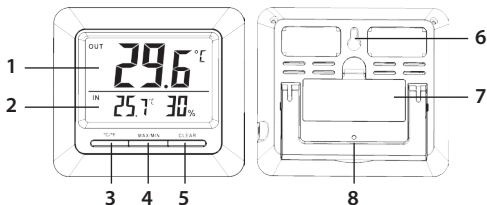

GB Thermometer

The thermometer measures indoor and outdoor temperature, indoor humidity and records the minimum and maximum temperature.

Technical Information:

Choice of temperature units: °C/°F

Range of measurement for indoor temperature: 0 °C to +50 °C,
increments of 0.1 °C

Range of measurement for outdoor temperature: -40 °C to +50 °C,
increments of 0.1 °C

Temperature measurement accuracy: ±1.5 °C

Indoor humidity range: 20 % to 95 % RH, increments of 1 %

Humidity measurement accuracy: ±5 % for range 30 % to 85 %, otherwise ±7 %

Wire probe length: 3 m

Power supply: 1× 1.5 V AAA batteries

Thermometer Description:

1. Outdoor temperature
2. Indoor temperature and humidity
3. °C/°F switch
4. MAX/MIN button
5. CLEAR button
6. Opening for hanging in the wall
7. Battery compartment
8. Stand

Inserting Batteries

1. Remove the battery cover on the back of the device.
2. Insert a single 1.5 V AAA battery. Make sure to observe the correct polarity of the batteries according to the drawing at the bottom of the battery compartment. Use alkaline batteries only. Do not use rechargeable batteries.
3. Close the battery compartment.

Outdoor and indoor temperature/indoor humidity

1. Outdoor temperature value is shown in the top half of the display in the OUT field.
2. Indoor temperature value is shown in the bottom half of the display in the IN field.

To measure outdoor temperature, pull the wire probe underneath a window which is not frequently used.

With frequent opening, the wire probe may be damaged or destroyed.

The outdoor portion of the temperature wire probe must be anchored so as to prevent its tearing off in the wind.

Changing Temperature Units °C/°F

Repeatedly pressing the °C/°F button changes the display between °C or °F units.

Recording Maximum and Minimum Temperature/ Humidity

The thermometer automatically records the values of maximum and minimum measured temperature and humidity.

Repeatedly pressing the MAX/MIN button will display the measured values.

Pressing the CLEAR button while in the MAX/MIN display mode will erase the memory.

Care and Maintenance

The product is designed to provide trouble-free service for many years if used appropriately.

Here is some advice for proper operation:

Read the manual carefully before using this product.

- Do not expose the product to direct sunlight, extreme cold and moisture, and sudden changes in temperature.
- This would reduce accuracy of detection.
- Do not place the product in locations prone to vibration and shocks – these may cause damage.

Obsah je uzamčen

Dokončete, prosím, proces objednávky.

Následně budete mít přístup k celému dokumentu.



Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

**) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!