



### Přehled

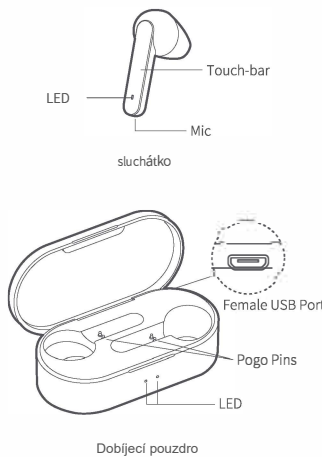

### Jak sluchátka nosit

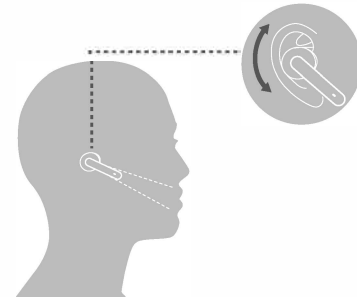


Směrování mikrofonu k ústům

### TWS režim

Otevřte pouzdro a vyjměte obě sluchátka. Ta se automaticky zapnou a vzájemně spárují. Pravé sluchátko se automaticky přepne do režimu párování s telefonem, jakmile levá LED dioda zhasne. Na telefonu vyhledejte v dostupných BT zařízeních QCY T3 R a klepněte pro připojení.

Pokud se sluchátka vzájemně nespárují, použijte následující postup:

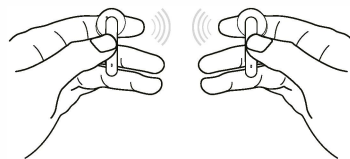

Vypněte sluchátka. Následně držte obě dotykové plochy cca 20 s (nebo dokud nezačne dioda blikat bíle a červeně). Vraťte obě sluchátka do pouzdra a znovu je vyjměte. Sluchátka se zapnou a vzájemně spárují. Párování sluchátka s telefonem bude možné, jakmile dioda na levém sluchátku zhasne. V dostupných BT zařízeních na telefonu vyhledejte QCY T3 R a zvolte pro připojení.

### Zapnutí

Přidrže dotykovou plochu 2 s nebo otevřete pouzdro. Během nabíjení se při vyjmutí sluchátek z pouzdra rozsvítí LED bíle na 1 sekundu.

### Vypnutí

Přidrže dotykovou plochu 8 sekund nebo vraťte sluchátka zpět do pouzdra (LED bude 2 s svítit červeně).

### Ovládání hlasitosti

Hlasitost +: posunutí prstem nahoru po dotykové ploše  
Hlasitost -: posunutí prstem dolů po dotykové ploše

### Následující / předchozí skladba

Během přehrávání přidrže dotykovou plochu 2 sekundy (L = předchozí, R = následující skladba)


### Hlasový asistent

Trojité poklepání na levou dotykovou plochu aktivuje hlasového asistenta.

### Tovární nastavení

Vypněte sluchátka a přidrže dotykovou plochu 20 s dokud LED nezabliká červeně / bíle a nezhasne.


### Přehrávání v režimu Stereo



### Play / Pauza

Pozastavení / obnovení přehrávání provedete dvojitým poklepáním na dotykovou plochu sluchátka.


### Mono Mode




1. Power off earphones then touch the bar on either earbud for 5s to enter pairing mode (LED blinks red and white)
2. On cellphone, search for QCY-T3\_R/L and tap to connect

### Operation

**Power-on**  
Touch the bar for 2s (LED will glow solid white for 1s)  
When charging, pick up earbud from the case (LED will glow solid white for 1s)




**Power-off**  
Touch the bar for 8s (LED turns on red for 2s) or pop earbud back into the case




### Answer Call

Double touch the bar to answer incoming call and double touch again to end it



### Ignore Call

Touch the bar for 2s to ignore incoming call




### Three-way Calling & Switch

Double touch the bar to answer incoming call from phone1. If another call is coming from phone2 in sync, double touch the bar to put the first call on hold while activating the second one.  
Switch: touch the bar for 2s to switch between active call and held call


### Charging the Earphones

Put earbuds into the case to charge and they will auto power off. LED will glow solid red when charging and turn to white for 1 minute once topped up.



### Charging the Case

Charge the case via USB cable. LED will glow solid green when charging and turn off once topped up.



### Features

- BT v5.0 chipset transmits signal stably with low lag
- Easy touch control
- Crystal-clear stereo talking thanks to NC technology

### Product Parameters

Model: In1832  
BT version: V5.0  
Standby time: approx. 150hr  
Charging time: approx. 2hr  
Music time: approx. 5 or 6hr  
Talking time: approx. 5 or 6hr  
Operation range: 10m (with no obstacle)  
Battery type: Li-ion  
Battery capacity (earphones): 3.7V 60mAh  
Battery capacity (charging case): 3.7V 600mAh  
Input parameter (charging case): 5V --- 500mA  
BT profiles: HSP/HFP/A2DP/AVRCP  
(All technical data shall be subject to practical performance)



### Hazardous substances and their contents in the item

Part Name	Hazardous Substances									
	Pb	Hg	Cd	Cr (VI)	PBB	PBDE	DIBP	DEHP	DBP	BBP
Main body	X	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
Ear tips	O	O	O	O	O	O	O	O	O	O
Accessories	O	O	O	O	O	O	O	O	O	O
Charging cable	X	O	O	O	O	O	O	O	O	O

This form is made by SJ/T 11364 regulation.  
O: means that hazardous substance content in the homogeneous materials of this part is within the limits of (EU) 2015/863 regulation.  
X: means that hazardous substance content in, at least, one certain homogeneous material of this part is beyond the limits of (EU) 2015/863 regulation, but there is no mature alternative in the industry at present, it still conforms to the EU ROHS Directive in the scope of exemption.

Notes: Please arrange using time properly as your hearing may be damaged by using the device for a long time.  
Perform standard: Q/HL 1-2019; Q/HL 2-2017  
Manufacturer: Dongguan Hele Electronics Co., Ltd.  
Address: Daojiao Town, Dongguan City, Guangdong, China

### Tips

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode; if left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

### Caveats

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

### Warranty Card

Warranty Period  
12 months after you purchase this item. (or you may inquire your local shopper for more details.)  
Free Service:  
Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free exchange service.

Model Number:
Date of Purchasing:
User's Name:
User's Phone:
User's Address:
Shop's Name:
Shop's Address:
Comments:

Free exchange service will not be accessed under following circumstances:  
1. Damages caused unauthorized disassembly.  
2. Defects or physical damages caused by leaking or dropping off.  
3. Damages by act of God. Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
-- Reorient or relocate the receiving antenna.  
-- Increase the separation between the equipment and receiver.  
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

