

SENCOR®



SDC 1200

User's manual

Návod k obsluze

Návod na obsluhu

Használati útmutató

Instrukcja obsługi

EN

CZ

SK

HU

PL


RADIO CONTROLLED CLOCK
WITH TEMPERATURE

RÁDIEM ŘÍZENÉ HODINY S TEPLMĚREM

RÁDIOM RIADENÉ HODINY S TEPLMEROU

RÁDIÓ VEZÉRLÉSŰ ÓRA HŐMÉRŐVEL

ZEGAR STEROWANY RADIOWO Z TERMOMETREM

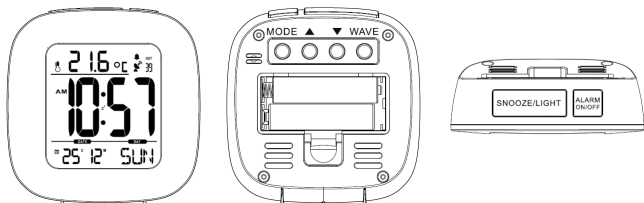

BATTERY ASSEMBLING






Open the battery compartment cover. Insert 2xAAA batteries according to the correct polarity showed in the compartment.

Once powering on, the clock will start RC signal searching automatically. Press 'WAVE' button to stop the RC signal searching.

MANUAL SETTING

Under normal displaying mode, hold on pressing 'MODE' button for seconds to enter into time setting mode, the setting digit will be flashing. Press ▲ or ▼ to adjust. The setting order is 12/24hr → time zone → hour → minute → year → month → date → language of week. Press 'MODE' button to confirm the setting. If there is no operation in 30 seconds, it will turn to normal time displaying mode automatically.

ALARM & SNOOZE SETTING

Under normal time displaying mode, hold on pressing  button for seconds to enter into alarm setting mode, the setting digit will be flashing. Press ▲ or ▼ button to adjust. The setting order is hour à minute. Press  button to confirm the setting. Press  button again to turn on the alarm function. There would be an icon of  display on the screen. Press  button once more to turn off the alarm function. The alarm icon would disappear.


The alarm sound will last for 2 minutes, and will change as below:

0-10 seconds: BI per second

11-20 seconds: BI BI per second

21-30 seconds: BI BI BI per second

>30 seconds: Keep BI

When alarm ring is on, press 'SNOOZE/LIGHT' button to turn off the alarm sound, the icon of  will flash, the alarm sound will be on again after 5 minutes. When the snooze function is on, press any other button to turn off the snooze function. When the alarm ring is on, press any other button to cancel the alarm sound. The alarm will be on again after 24 hours. Press 'SNOOZE/LIGHT' to turn on the backlight. The backlight will last about 5 seconds.

TEMPERATURE

The indoor temperature will adjust within 3-8 minutes automatically after powering on. Press ▼ button to change between °C/°F.

Obsah je uzamčen

Dokončete, prosím, proces objednávky.

Následně budete mít přístup k celému dokumentu.



Proč je dokument uzamčen? Nahněvat Vás rozhodně nechceme. Jsou k tomu dva hlavní důvody:

- 1) Vytvořit a udržovat obsáhlou databázi návodů stojí nejen spoustu úsilí a času, ale i finanční prostředky. Dělali byste to Vy zadarmo? Ne*. Zakoupením této služby obdržíte úplný návod a podpoříte provoz a rozvoj našich stránek. Třeba se Vám to bude ještě někdy hodit.

**) Možná zpočátku ano. Ale vězte, že dotovat to dlouhodobě nelze. A rozhodně na tom nezbohatneme.*

- 2) Pak jsou tady „roboti“, kteří se přiživují na naší práci a „vysávají“ výsledky našeho úsilí pro svůj prospěch. Tímto krokem se jim to snažíme překazit.

A pokud nemáte zájem, respektujeme to. Urgujte svého prodejce. A když neuspějete, rádi Vás uvidíme!